

FIG. 1
PRIOR ART

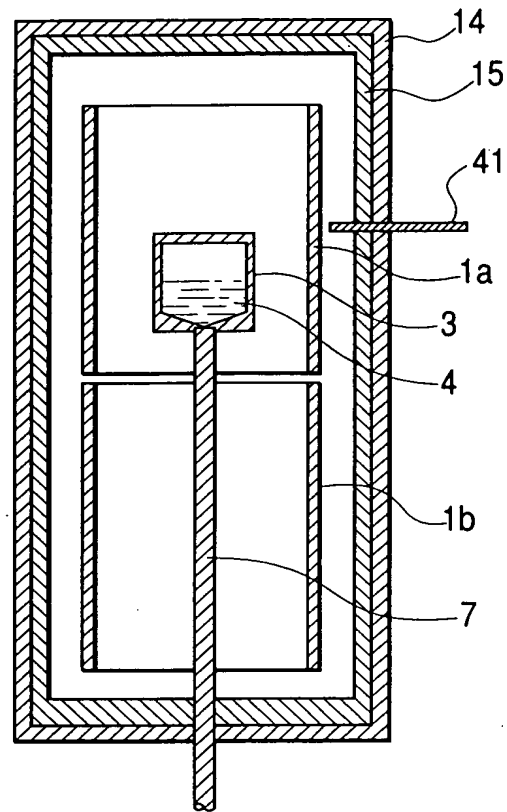


FIG. 2

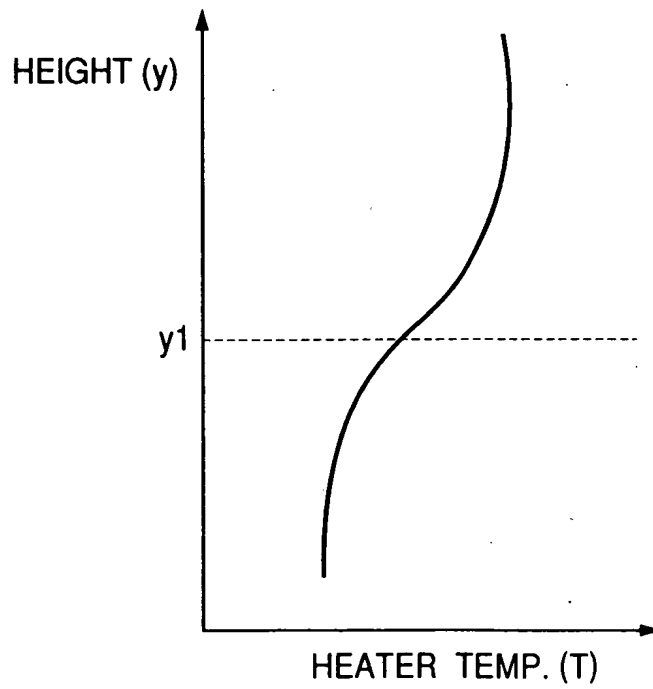


Fig. 1 is a cross-sectional view of a device. It features a central assembly 5, which is composed of several layers 1a and 1b. This assembly is supported by a base 4. The base 4 is further supported by a vertical rod 7. The entire assembly is housed within a housing 14, which has an inner wall 15. A label 1b points to the base 4.

FIG. 4A

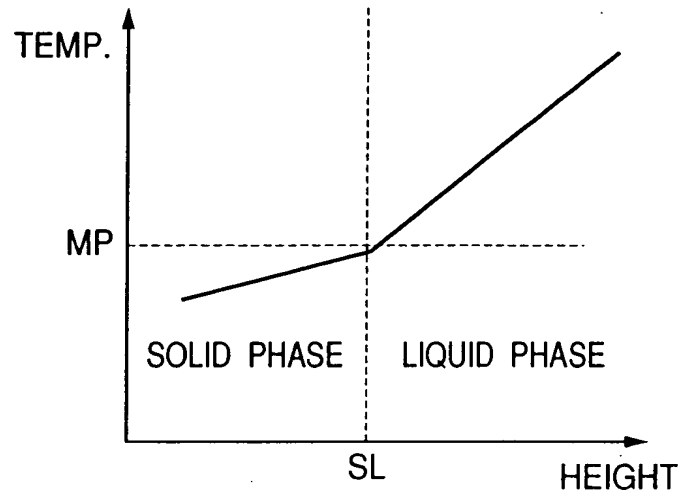


FIG. 4B

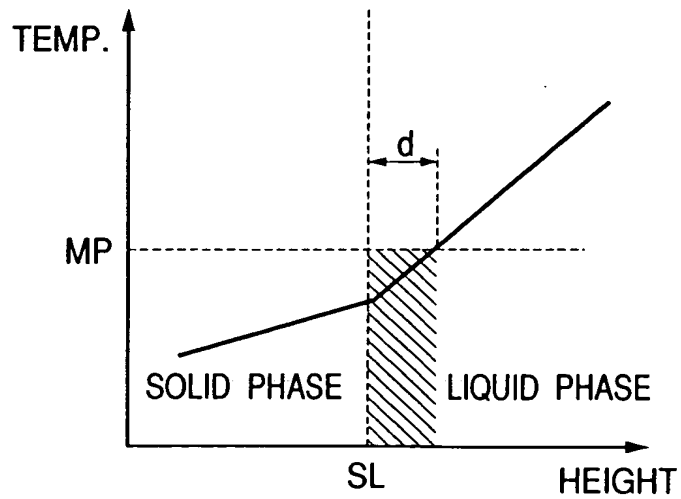


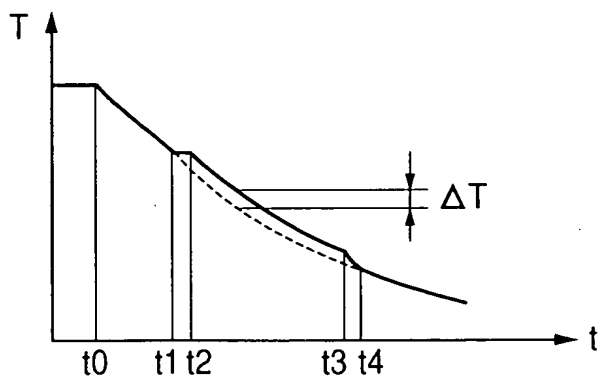
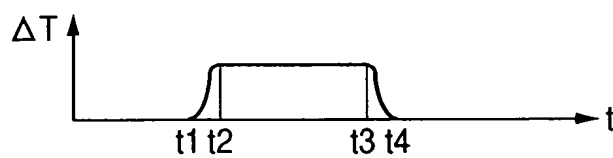
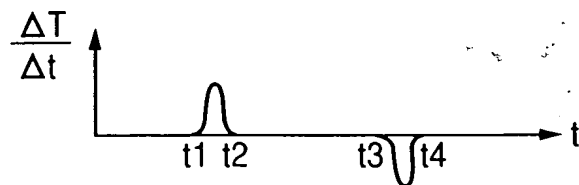
FIG. 5A*FIG. 5B**FIG. 5C*

FIG. 6

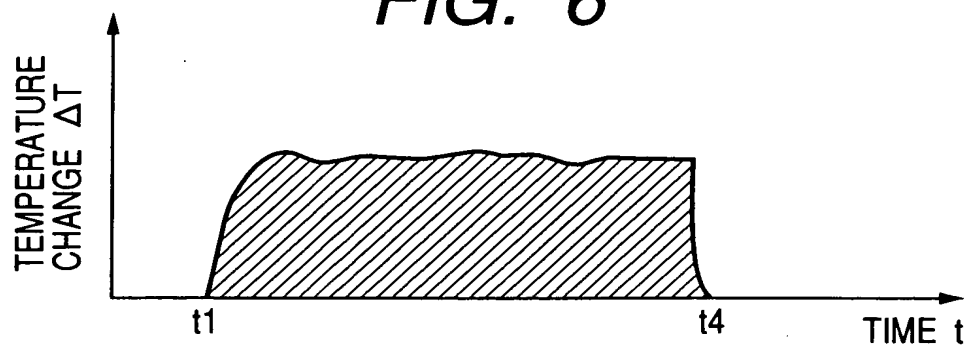


FIG. 7

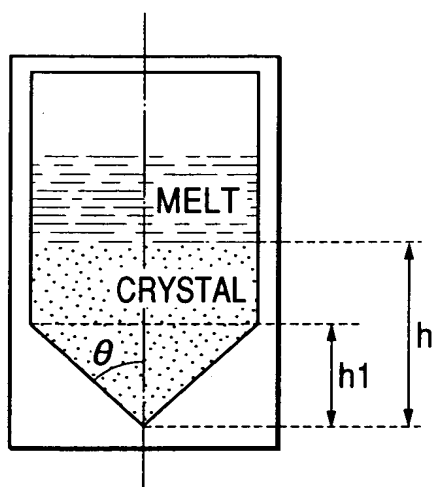


FIG. 8

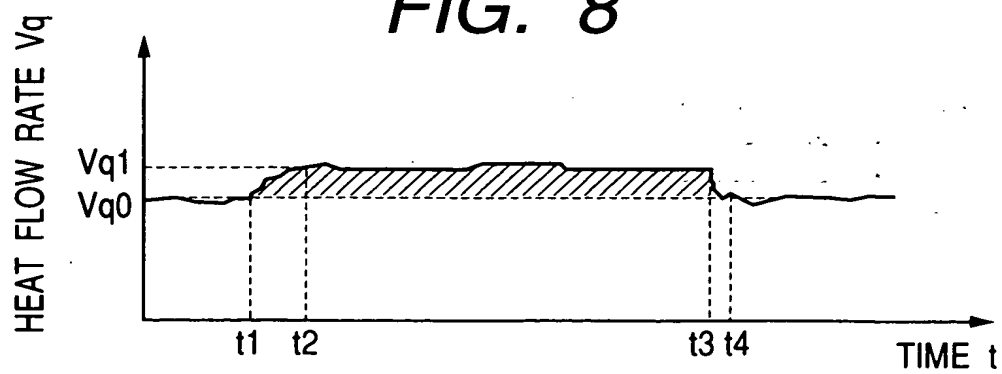


FIG. 9A

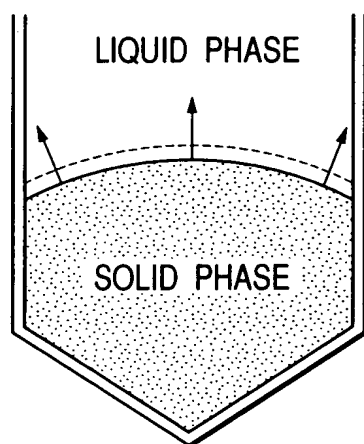


FIG. 9B

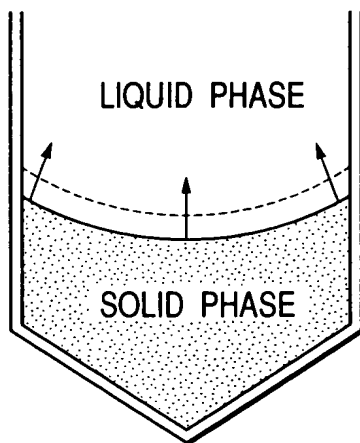


FIG. 10

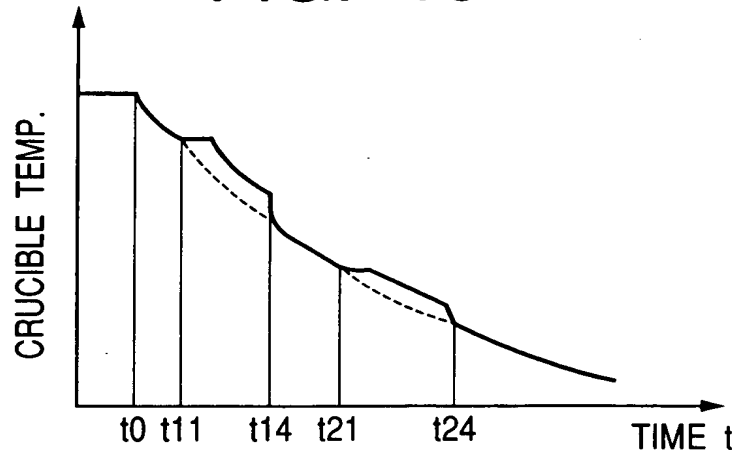


FIG. 11

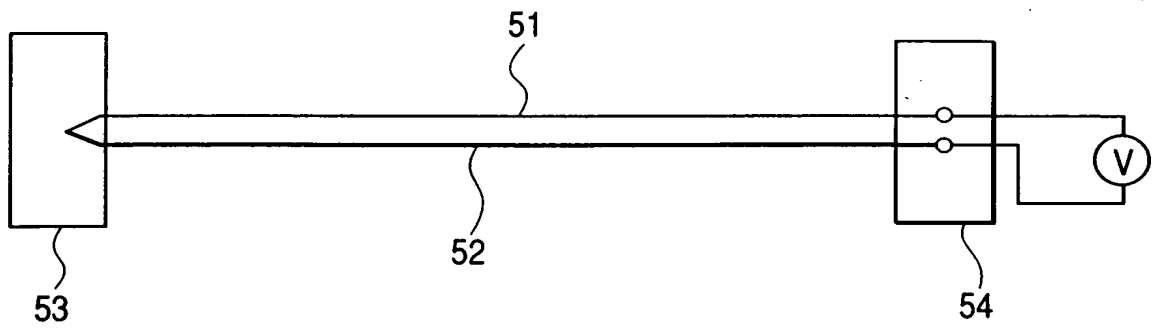


FIG. 12

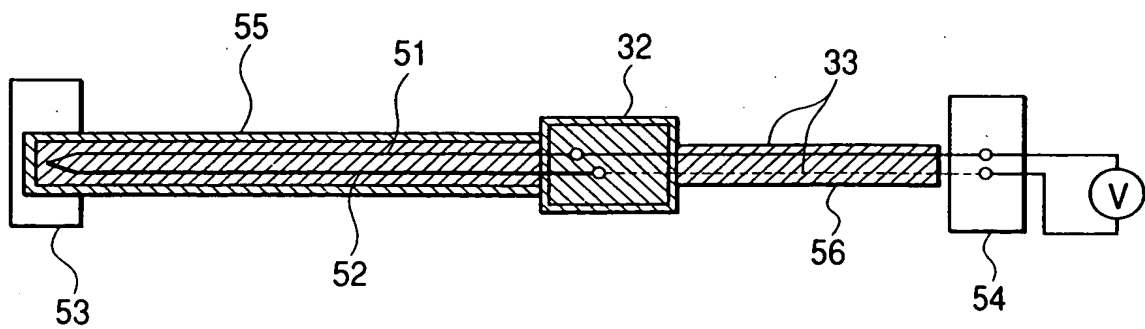
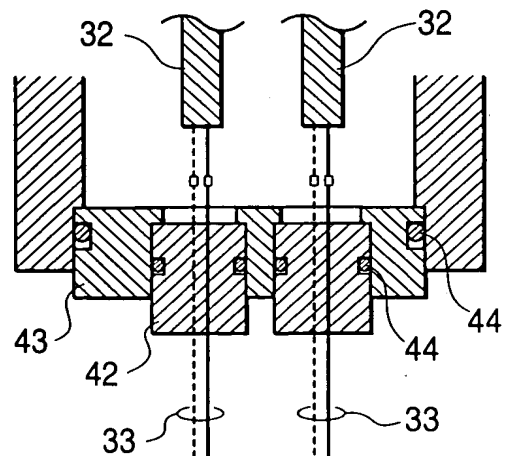


FIG. 14

FIG. 15



14

15

18

7

9

16

10

17

13

12

11

19

1a

3

4

1b

8

2a

2b

6

FIG. 18

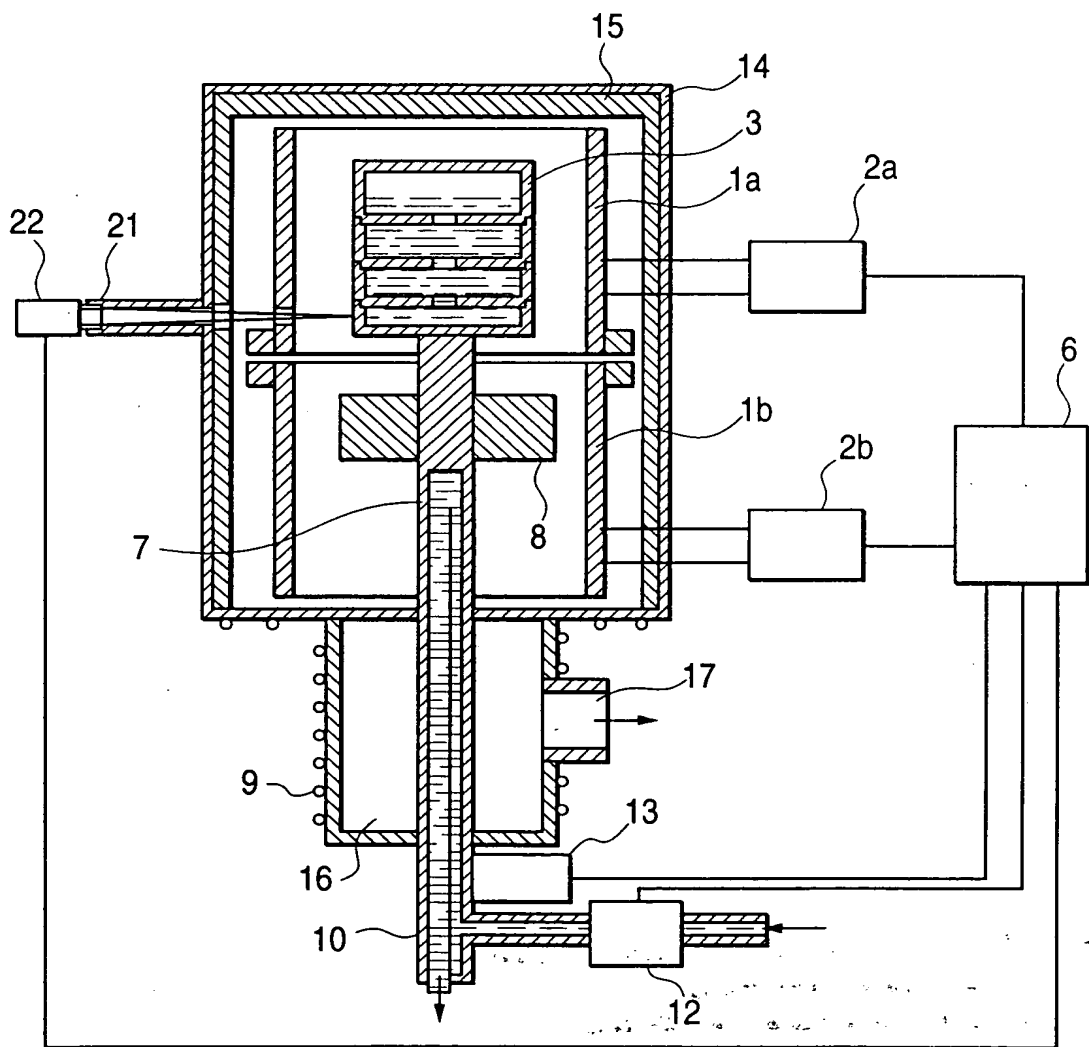


FIG. 19A

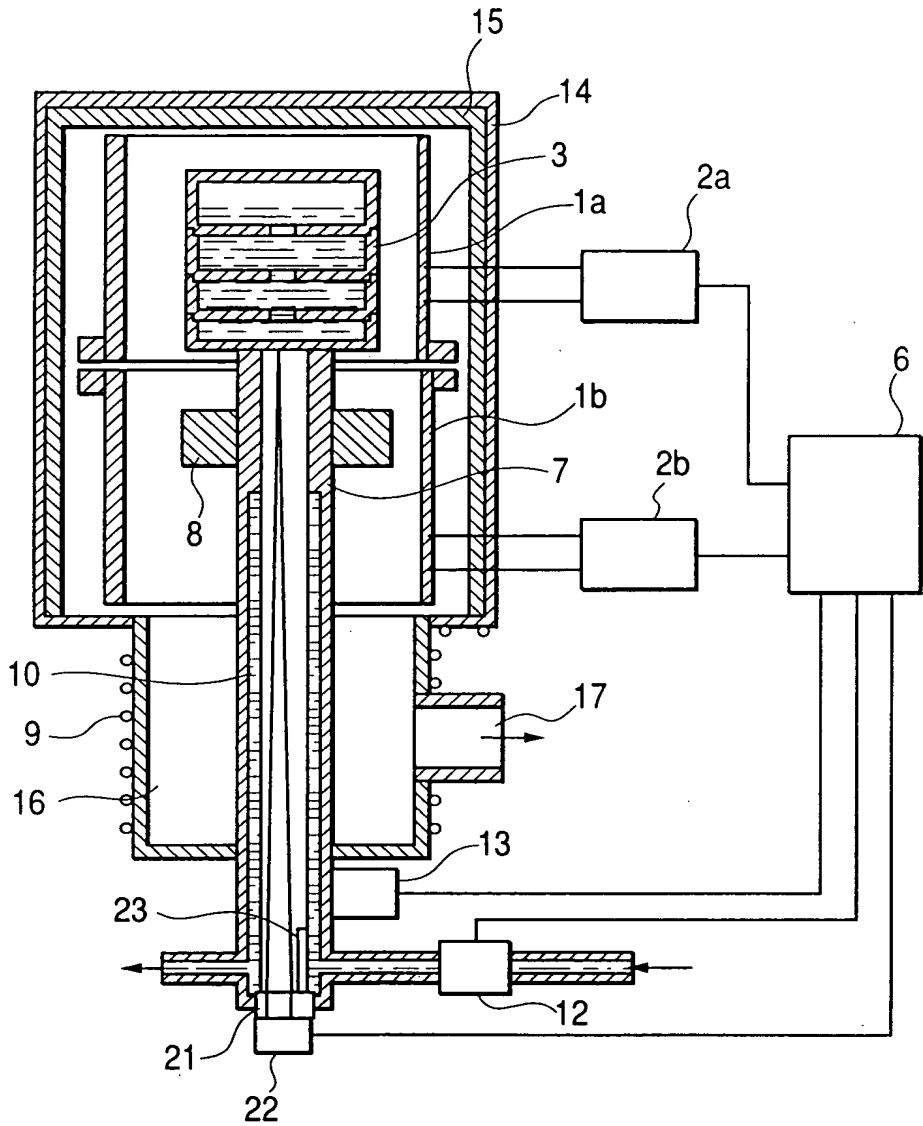


FIG. 19B

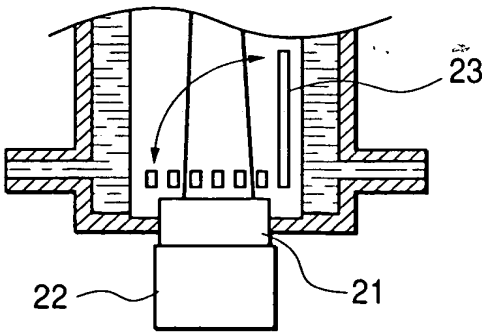


FIG. 21

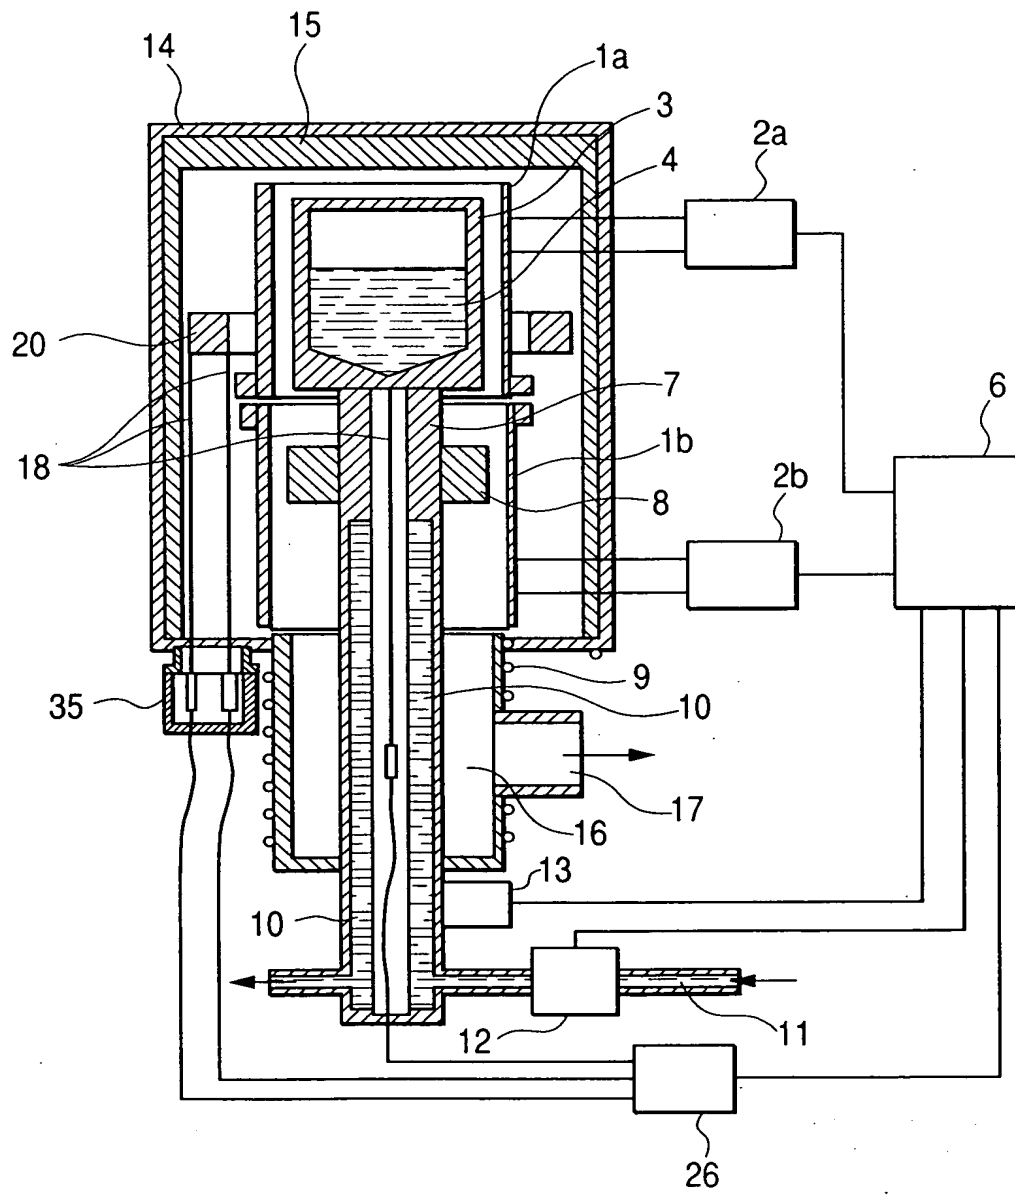


FIG. 22

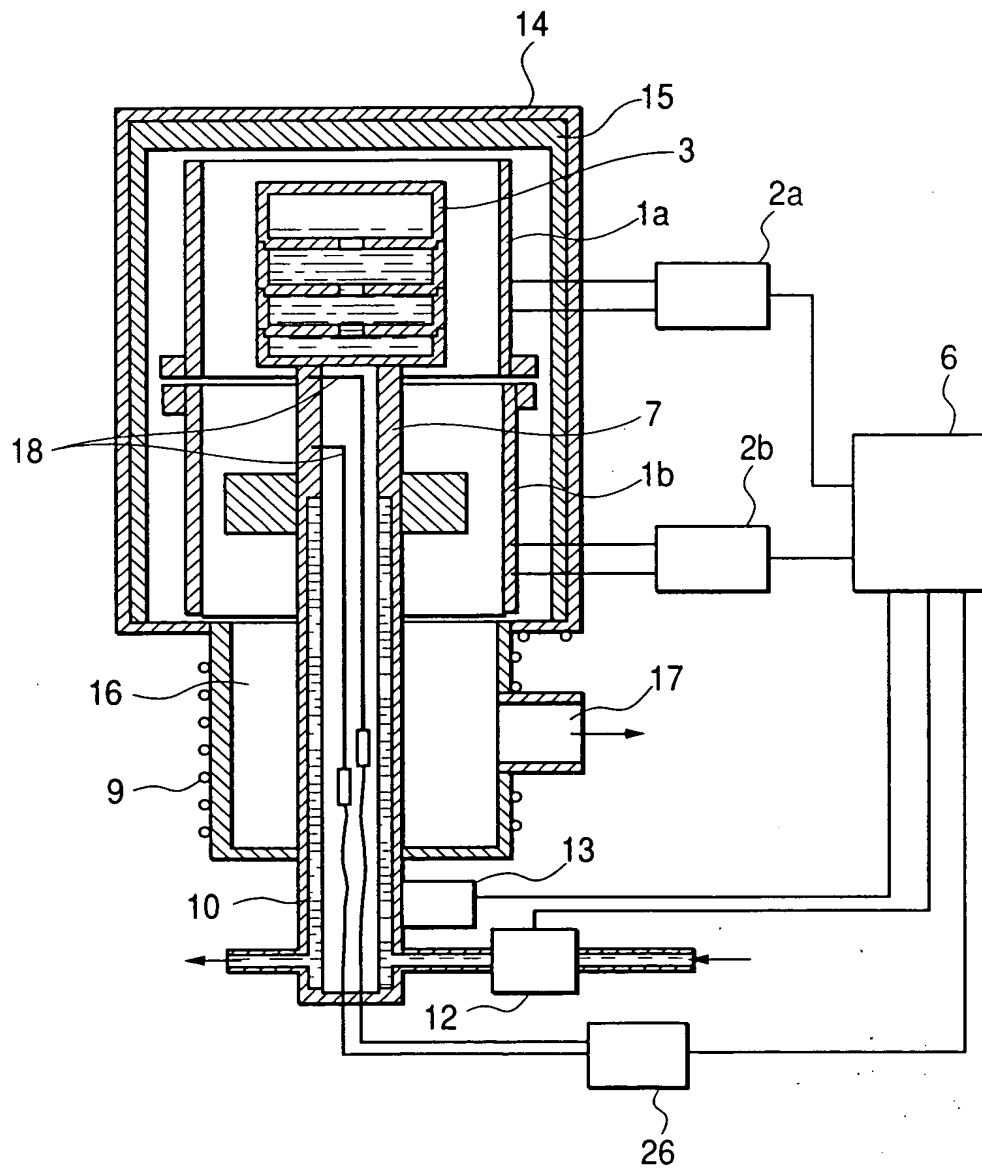


FIG. 23

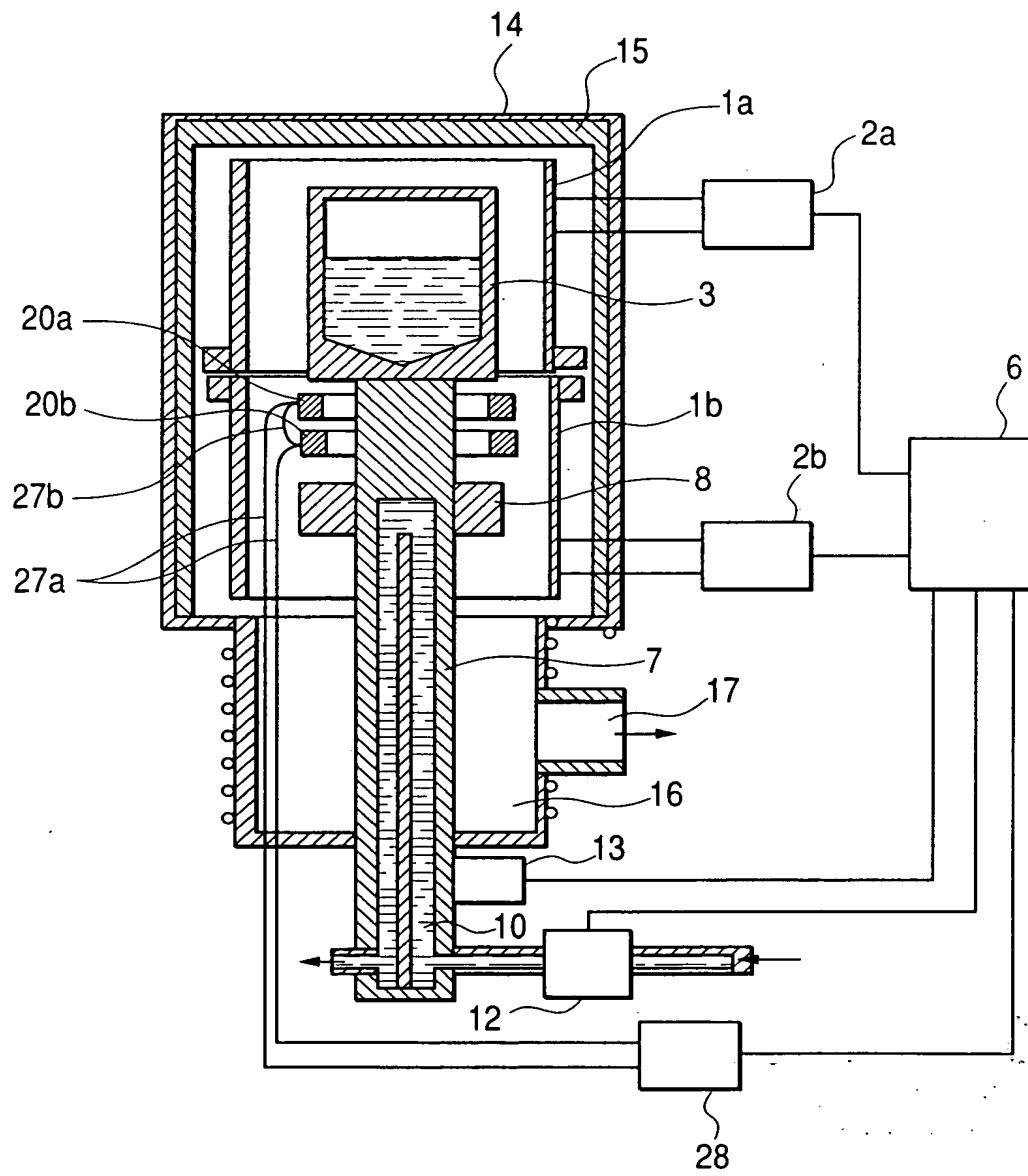


FIG. 24A

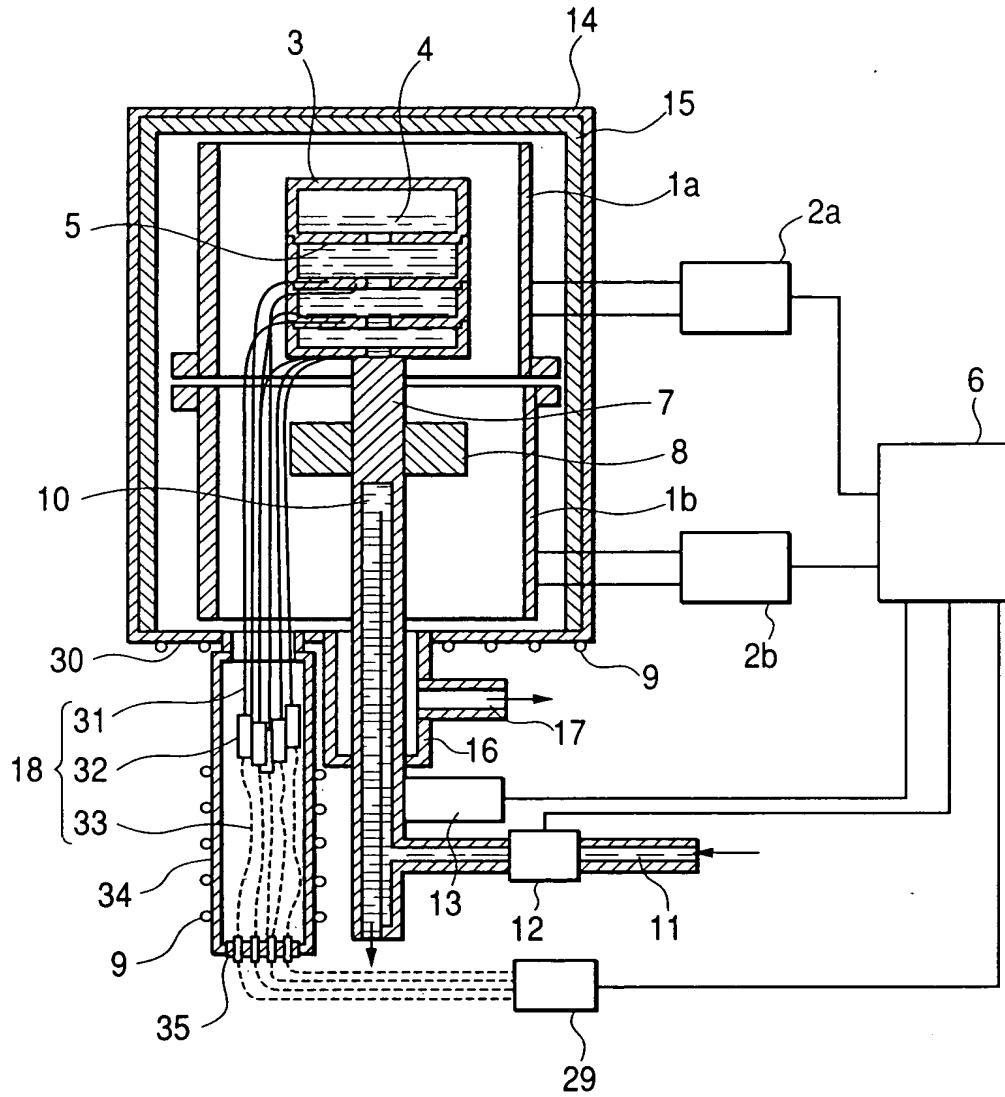


FIG. 24B

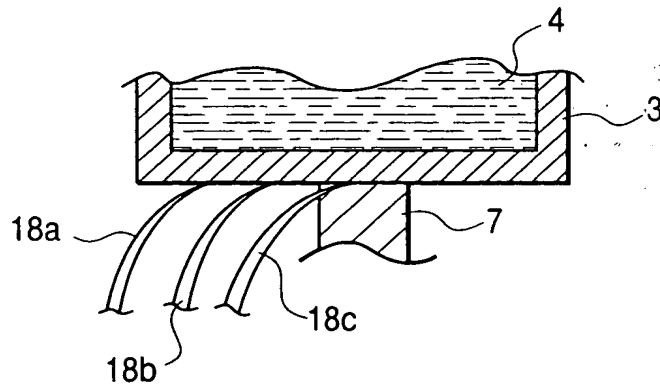


FIG. 25

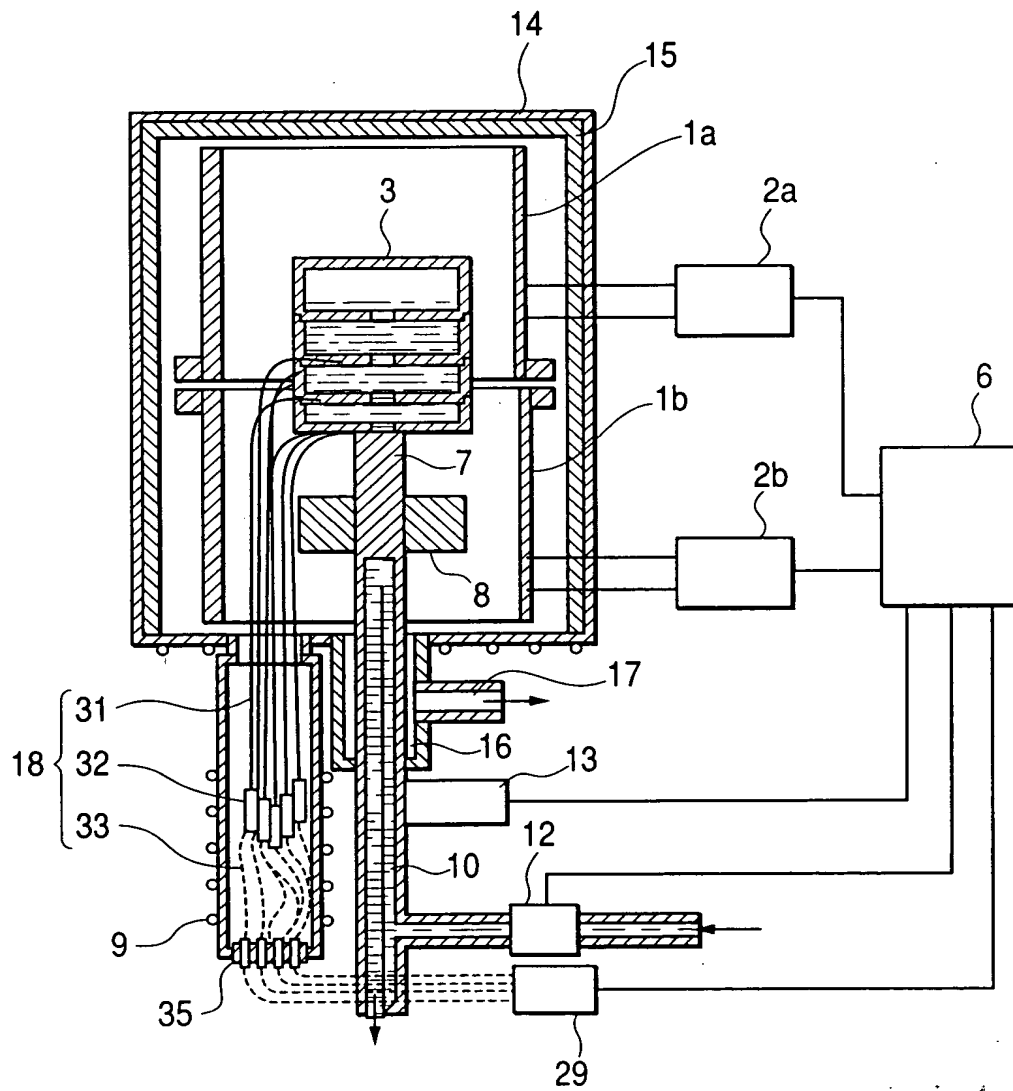
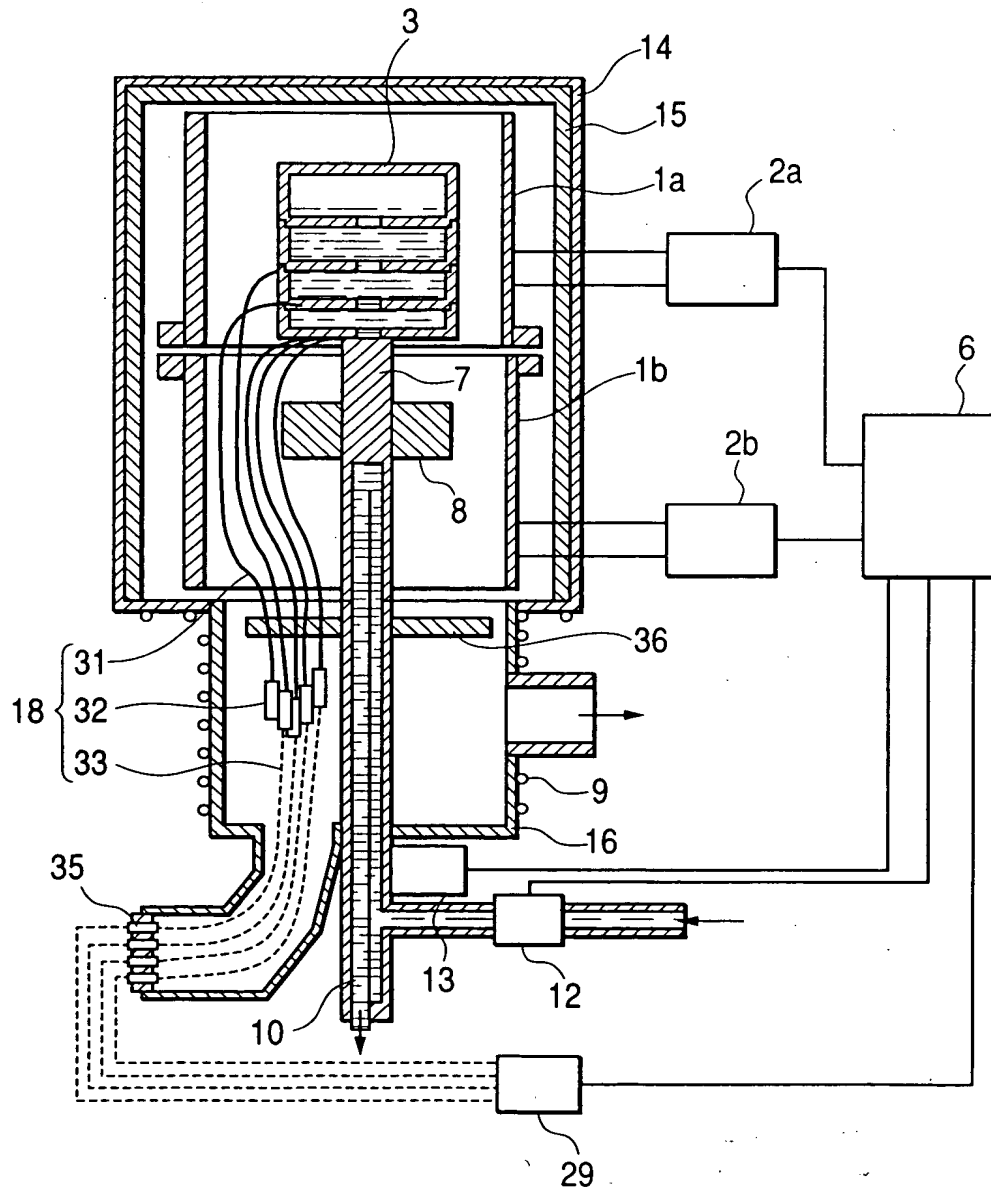


FIG. 26



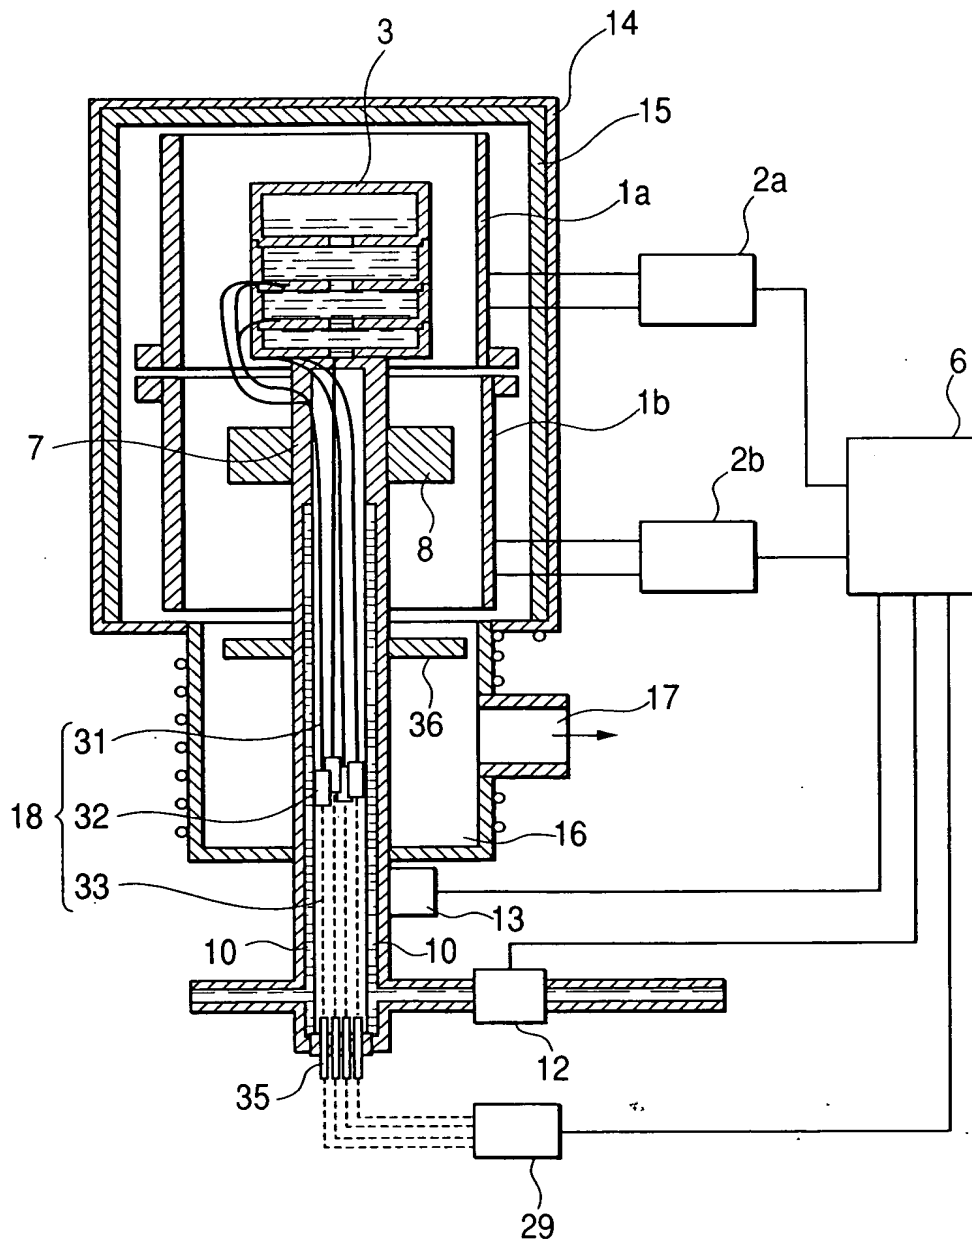
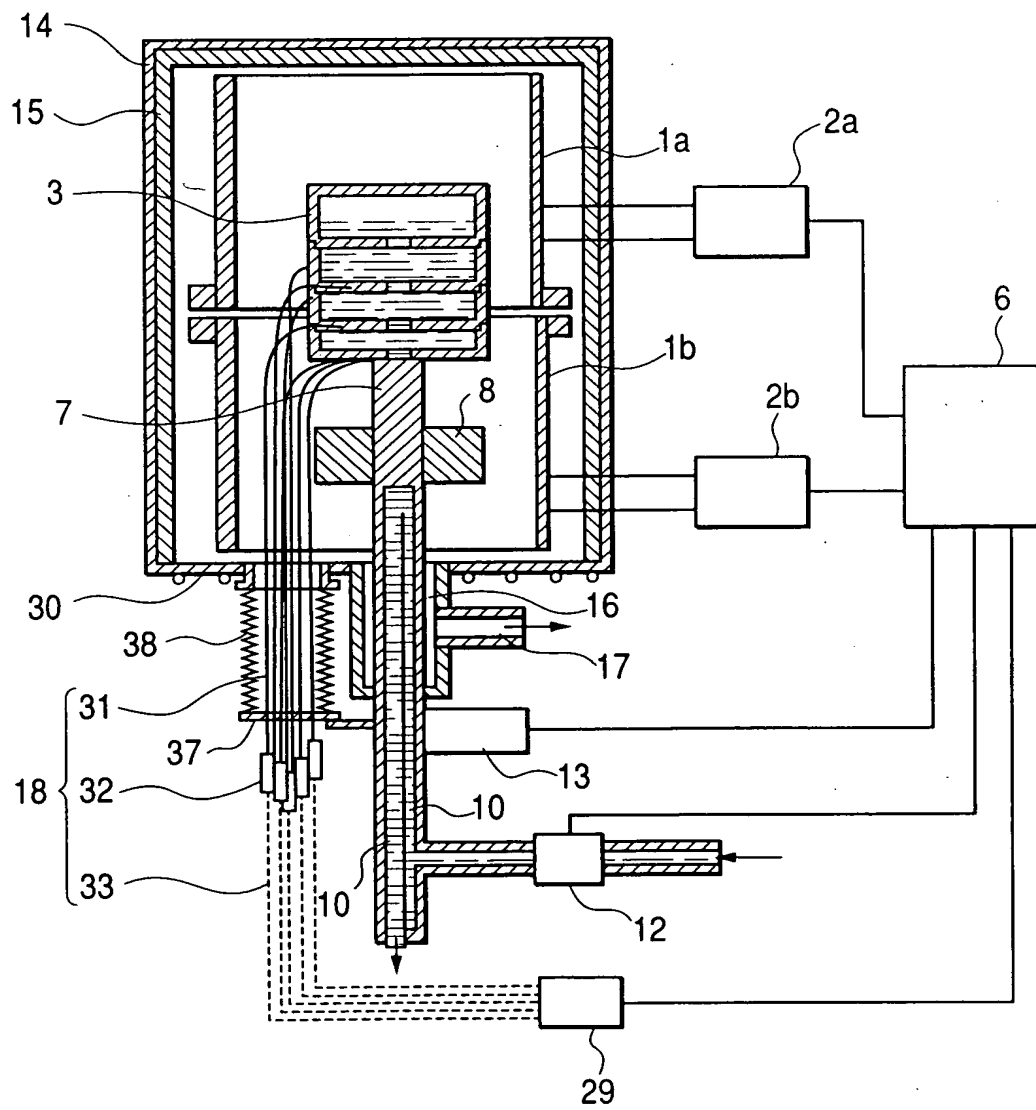


FIG. 28



[illegible]